


LM Mini Series

3km Miniature Laser Rangefinder Module

• Wavelength 1,535nm • Class 1

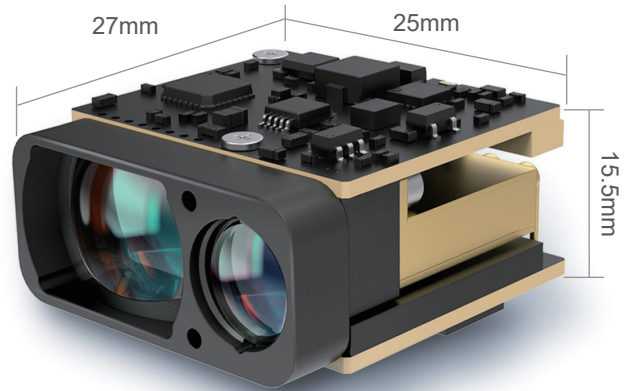

Product Introduction

The new LM Mini series of miniature laser rangefinder modules is developed based on our self-developed 1,535 nm erbium glass laser, and it is a Class 1 eye-safe product. The product has significant advantages in size and weight, supporting a measurement range of 10-4,000m, with a detection range of up to 3,000m for vehicle targets. Compared with the previous generation 1535 nm rangefinder module of the same measuring range, the size has been reduced by 66% and the weight by 56%. While achieving ultimate miniaturization and lightweight design, this product further reduces power consumption and features stable performance and high shock resistance. The module supports functions such as single measurement, continuous measurement, first/last target, and multi-target ranging. It can be widely used in civilian UAVs, outdoor observation, and security applications.

Product Highlights



Ultra-lightweight and Miniature Design Suitable for Space-constrained Scenarios

Ultra-compact design, 27×25×15.5mm mini body, 14g ultra-lightweight, enabling effortless integration into equipment.
Class I eye-safe certification, compliant with international certification standards



Ultra-long-range and Precise Ranging Low Power Consumption for Extended Endurance

10-4,000m ultra-wide measurement range, adaptable to multiple application scenarios
±1m accuracy across the entire measurement range, with a small beam divergence for precise target acquisition
Operating power consumption is as low as 0.9W across the full temperature range, minimizing the power load on the host system



Stable Performance in Complex Scenarios Developer-Friendly and Easy to Integrate

Wide operating temperature range and shock-resistant design ensure stable performance in harsh environments
Standard UART (TTL 3.3V) interface, compatible with mainstream systems, plug-and-play
A GUI software and a full communication protocol command set are provided to support secondary development

Specifications

Product Series		LM Series
Product Model		LM3000 mini
Basic Features		
Laser Wavelength		1535nm $\pm$ 5nm
Eye Safety Level		Class 1 (IEC 60825-1)
Laser Divergence Angle		$\sim$ 0.6mrad
Ranging Performance (Buildings)		10~4000m
Ranging Performance (2.3 $\times$ 2.3 m Vehicles)		10~3000m
Ranging Frequency		1~10Hz (adjustable)
Ranging Accuracy		$\pm$ 1m
Accurate Measuring Rate		$\geq$ 98%
False Alarm Rate		$\leq$ 1%
Multi-target Detection		Up to 3
Electrical Indicators		
Communication Interface		UART (TTL_3.3V)
Operating Power Consumption		$\leq$ 1.5W@10Hz
Physical Properties		
Weight		14.2g $\pm$ 1g
Dimensions		27mm $\times$ 25mm $\times$ 15.5mm
Shock		1200g, 0.3ms
Vibration		5~50~5 Hz, 1 octave/min, 2.5g
Environmental Adaptability		
Operating Case Temperature		-20 $^{\circ}$ C~+70 $^{\circ}$ C
Storage Case Temperature		-20 $^{\circ}$ C~+75 $^{\circ}$ C

Applications



Civilian UAV Airborne



Engineering Survey



Security Gimbal



Handheld Rangefinder

Company Profile

Raytron Microelectronics Co., Ltd. is a wholly-owned subsidiary of Raytron Technology Co., Ltd., providing global customers with infrared detectors, core modules, and industry solutions.

Our products are widely used in various fields, including infrared temperature measurement, night vision observation, machine vision, intelligent driving, Commercial Drone, smart industry, security monitoring, Internet of Things, medical epidemic prevention and gas detection.

With the mission of "to create incremental value for customers with technological advancements", we are committed to leaving a name in the history of constantly expanding human perception capabilities.



Official Website



LinkedIn Official Account

Raytron Microelectronics Co., Ltd.

Tel (Global): +86 400-998-9038

WhatsApp Business: +86 198 0619 1838

Email: marketing@raytrontek.com

Website: www.raytron-microelectronics.com

Version: PL202610V1